RoHS Compliant | Customer Drawing | http://www.goxconn.com

修改记录(REVISION RECORD)				
序号(NO.)	版本(REV.)	日期(DATE)	设计(DESIGN)	修改说明(DESCRIPTION)

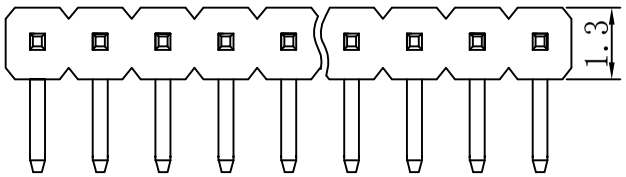

Specifications:
Current Rating:0.75 Amp
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute
Operating Temperature Range:-40° ~+105° C
Material And Finish
Insulator:Polyester,(PBT UL94V-0)
Insulator Color:Black
Contact:Brass
Contact Plated:See Contact Plated Tab.

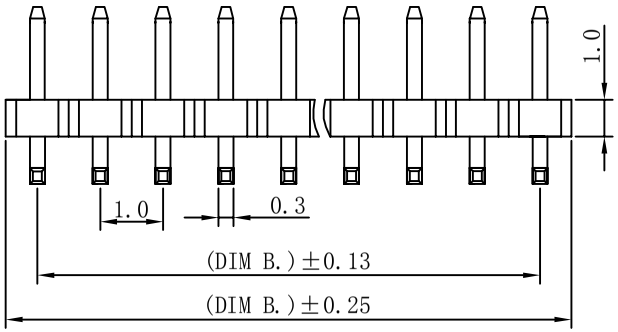



Ordering information

1 1 10- XX - 1 10 R G0 X 3 1

PH

NO. of Rows: 1. Single; 2. Double

Pitch:- 1. 08:0.8mm; 2. 10:1.0mm; 3. 27:1.27mm; 4. 20:2.0mm; 5. 25:2.54mm

No. of PIN: (1-100P); 40=40P; 15=15P

Plastic High: 10:1.0mm; 15:1.5mm; 16:1.6mm; 17:1.7mm; 20:2.0mm; 25:2.54mm

Welding: S:180; R:90; M:SMT; W:90SMT

Plastic Material: 1:PBT; 2:PA46; 3:PA6T; 4:PA9T; 5:LCP

Packing: 1:bag; 2:Tube; 3:Box; 4:Reel

Gold Plated		Selective				Full Tin Type	
Code	Full Gold	Code	Plated Type Contact Area	Solder Area	Code	Full Tin	
G0	Gold Flash	HF	Gold Flash	Tin 100u"	T1	Tin 100u"	
G1	Gold 1u"	H1	Gold 1u"	Tin 100u"	T2	Tin 200u"	
G2	Gold 2u"	H2	Gold 2u"	Tin 100u"	T3	Tin 150u"	
G3	Gold 3u"	H3	Gold 3u"	Tin 100u"			
G4	Gold 5u"	H4	Gold 5u"	Tin 100u"			
G5	Gold 10u"	H5	Gold 10u"	Tin 100u"			
G6	Gold 15u"	H6	Gold 15u"	Tin 100u"			
G7	Gold 20u"	H7	Gold 20u"	Tin 100u"			



P.C.B LAYOUT

Plastic Base

Type	可定制尺寸
H	1.0
PA	2.0
PB	2.3
PC	2.0

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		Goxconn®				
线性 (LINER)	角度(ANGLES)	品名 (TITLE): PH1.0*1.0 1*NP 90° DIP 系列图				A4
x ± --	x° ± 1°					
.x ± 0.20	.x° ± --					
.xx ± 0.15	.xx° ± --	绘图 (DRAWING)	Suzhaojing	料号(PART NO.):	1110-XX110RG0X-31	
.xxx ± 0.10	.xxx° ± --	审核 (CHECK)	Cel Wang	图号(DWG NO.):		
第三视角投影 THIRD ANGLE PROJECTION		核准 (APPROVED)	Andy Huang	比例(SCALE) 1:1	单位 (UNIT)	MM
		日期 (DATE)		版本(REV.) A0	页数(SHEET)	1 OF 1

RoHS Compliant	Customer Drawing	http://www.goxconn.com

修改记录(REVISION RECORD)				
序号(NO.)	版本(REV.)	日期(DATE)	设计(DESIGN)	修改说明(DESCRIPTION)

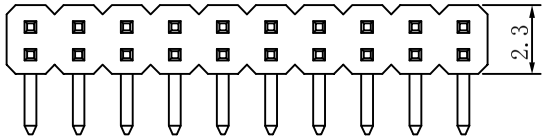

Specifications:
Current Rating:0.75 Amp
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute
Operating Temperature Range:-40° ~+105° C
Material And Finish
Insulator:Polyester,(PBT UL94V-0)
Insulator Color:Black
Contact:Brass
Contact Plated:See Contact Plated Tab.

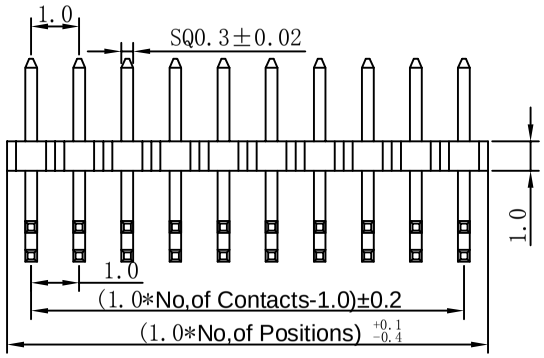



Ordering information

1 2 10- XX - 1 10 R G0 X 3 1

PH

NO.of Rows
1.Single
2.Double

Pitch:
1.08:0.8mm
2.10:1.0mm
3.27:1.27mm
4.20:2.0mm
5.25:2.54mm

No. of PIN:
(1-100P)
40=40P
15=15P

Plastic High:
10:1.0mm
15:1.5mm
16:1.6mm
17:1.7mm
20:2.0mm
25:2.54mm

Welding:
S:180
R:90
M:SMT
W:90SMT

Plastic Material:
1:PBT
2:PA46
3:PA6T
4:PA9T
5:LCP

Packing:
1:bag
2:Tube
3:Box
4:Reel

Gold Plated		Selective			Full Tin Type	
Code	Full Gold	Code	Plated Type Contact Area	Solder Area	Code	Full Tin
G0	Gold Flash	H F	Gold Flash	Tin 100u"	T1	Tin 100u"
G1	Gold 1u"	H1	Gold 1u"	Tin 100u"	T2	Tin 200u"
G2	Gold 2u"	H2	Gold 2u"	Tin 100u"	T3	Tin 150u"
G3	Gold 3u"	H3	Gold 3u"	Tin 100u"		
G4	Gold 5u"	H4	Gold 5u"	Tin 100u"		
G5	Gold 10u"	H5	Gold 10u"	Tin 100u"		
G6	Gold 15u"	H6	Gold 15u"	Tin 100u"		
G7	Gold 20u"	H7	Gold 20u"	Tin 100u"		

Plastic Base

Type	可定制尺寸
H	1.0
PA	2.0
PB	3.0
PC	2.0

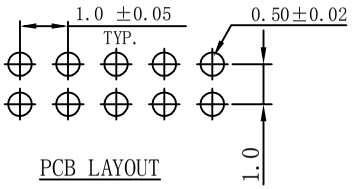

PCB LAYOUT

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		Goxconn®				
线性 (LINER)	角度(ANGLES)	品名 (TITLE): PH1.0*1.0 2*NP 90° DIP 系列图				A4
x ± --	x° ± 1°					
.x ± 0.20	.x° ± --					
.xx ± 0.15	.xx° ± --	绘图 (DRAWING)	Suzhaojing	料号(PART NO.):	1210-XX110RG0X-31	
.xxx ± 0.10	.xxx° ± --	审核 (CHECK)	Cel Wang	图号(DWG NO.):		
第三视角投影 THIRD ANGLE PROJECTION		核准 (APPROVED)	Andy Huang	比例(SCALE) 1:1	单位 (UNIT)	MM
		日期 (DATE)		版本(REV.) A0	页数(SHEET)	1 OF 1