



Specifications:
 Current Rating: 1.0 Amp
 Contact resistance: 20m Ohm Max
 Insulator resistance: 1000M ohm min.
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40° ~ +105° C
 Material And Finish
 Insulator: Polyester, (PA6T UL94V-0)
 Insulator Color: Black
 Contact: Brass
 Contact Plated: See Contact Plated Tab.

Ordering information

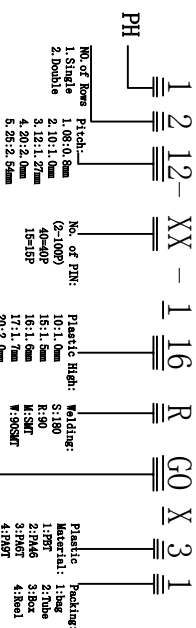

Code	Material	Thickness	Code	Material	Thickness
00	load 100"	Th. 100"	10	load 100"	Th. 100"
01	load 10"	Th. 100"	11	load 100"	Th. 100"
02	load 20"	Th. 100"	12	load 200"	Th. 150"
03	load 30"	Th. 100"	13	load 300"	Th. 150"
04	load 40"	Th. 100"	14	load 400"	Th. 100"
05	load 50"	Th. 100"	15	load 500"	Th. 100"
06	load 100"	Th. 100"	16	load 100"	Th. 100"
07	load 200"	Th. 100"	17	load 200"	Th. 100"

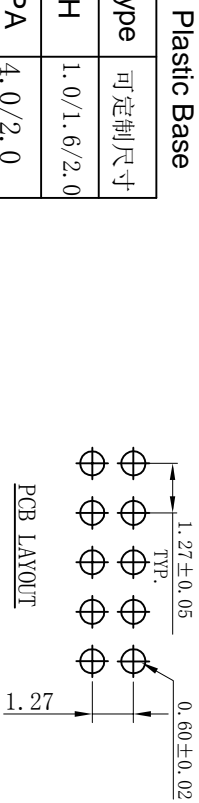

Type	可定制尺寸
H	1.0/1.6/2.0
PA	4.0/2.0
PB	4.0
PC	2.0/3.0

未注公差
UNLESS OTHERWISE
SPECIFIED TOLERANCE

线性 (LINER)
X ± --
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10

角度 (ANGLES)
X' ± ±
.X' ± ±
.XX' ± ±
.XXX' ± ±

第三视角投影
THIRD ANGLE
PROJECTION

品名 (TITLE):
PH1.27 2*NP 90° DIP 系列图

GOXCONN

A4

绘图 (DRAWING)	审核 (CHECK)	批准 (APPROVED)	日期 (DATE)
料号(PART NO.):	图号(DWG NO.):	单位 (UNIT)	页数 (SHEET)
1212-XX120RCOX-31	1:1	MM	10/1