


Specifications:  
 Current Rating: 1.5 Amp  
 Voltage Rating: 150V AC/DC  
 Contact resistance: 20m Ohm Max  
 Insulator resistance: 1000M ohm min.  
 Withstanding Voltage: 500V AC/Minute  
 Operating Temperature Range: -40° ~ +105° C  
 Material And Finish  
 Insulator: Polyester, (PBT UL94V-0)  
 Insulator Color: Black  
 Contact: Brass  
 Contact Plated: See Contact Plated Tab.

Ordering information



NO. of Rows Pitch:  
 1. Single 1.06:0.8mm  
 2. Double 2.10:1.0mm  
 3. 12:1.27mm  
 4. 20:2.0mm  
 5. 25:2.54mm


No. of PIN: (2-100P)  
 10:1.0mm S:180  
 15:1.0mm R:50  
 16:1.0mm M:SR  
 17:1.0mm W:SR  
 25:2.54mm

Plastic High: 10:1.0mm S:180  
 Material: 1:ong  
 2:TPB  
 3:PMPT  
 4:PMPT  
 5:12P

Order Code	Ordering Code	Ordering Code	Ordering Code
00	Lead Finish: 100°	100°	100°
01	Lead Finish: 100°	100°	100°
02	Lead Finish: 100°	100°	100°
03	Lead Finish: 100°	100°	100°
04	Lead Finish: 100°	100°	100°
05	Lead Finish: 100°	100°	100°
06	Lead Finish: 100°	100°	100°
07	Lead Finish: 100°	100°	100°

Plastic Base

Type	可定制尺寸
H	1.5/2.0
PA	4.0
PB	
PC	2.8

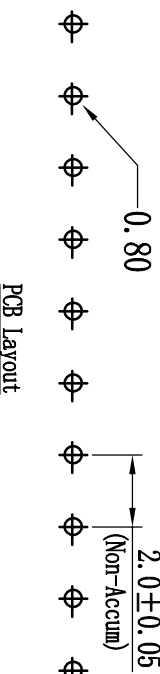

未注公差  
 UNLESS OTHERWISE  
 SPECIFIED TOLERANCE

品名 (TITLE): PH2.0 1\*NP 180° DIP 系列图  
 A4



线性 (LINER)	角度 (ANGLES)	品名 (TITLE)	审核 (CHECK)	批准 (APPROVED)	日期 (DATE)
X ± --	X' ± ±	PH2.0 1*NP 180° DIP 系列图	绘图 (DRAWING)	审核 (CHECK)	批准 (APPROVED)
.X ± 0.20	.X' ± ±		Subtooling	料号 (PART NO.)	图号 (DWG NO.)
.XX ± 0.15	.XX' ± ±		Call Wang	1120-XX1205GOX-31	比例 (SCALE)
.XXX ± 0.10	.XXX' ± ±		第三视角投影 THIRD ANGLE PROJECTION	版次 (REV)	单位 (UNIT)
			日期 (DATE)	版次 (REV)	页数 (SHEET)
				版次 (REV)	页数 (SHEET)

RoHS Compliant




Customer Drawing

http://www.goxconn.com

修改记录 (REVISION RECORD)


序号 (NO.)	版本 (REV.)	日期 (DATE)	设计 (DESIGN)	修改说明 (DESCRIPTION)
----------	-----------	-----------	-------------	--------------------

修改说明 (DESCRIPTION)

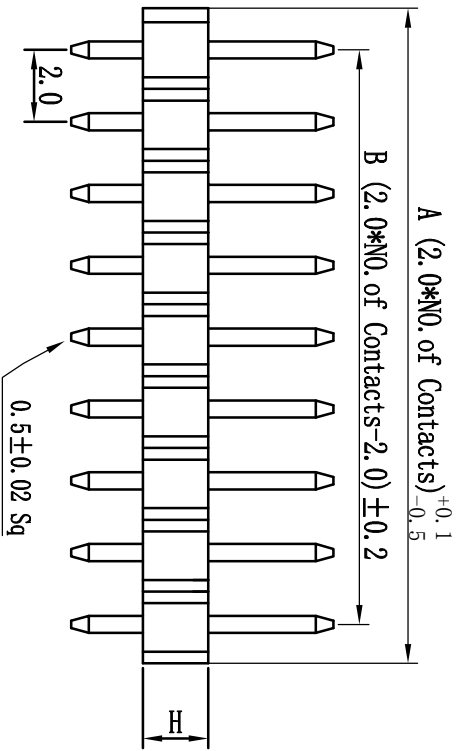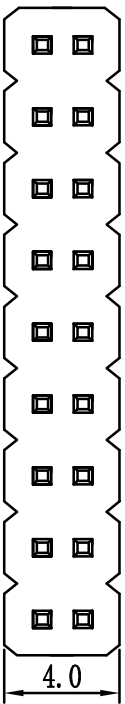


Plastic Base

Type	可定制尺寸
H	1.5/2.0
PA	4.0
PB	
PC	2.8

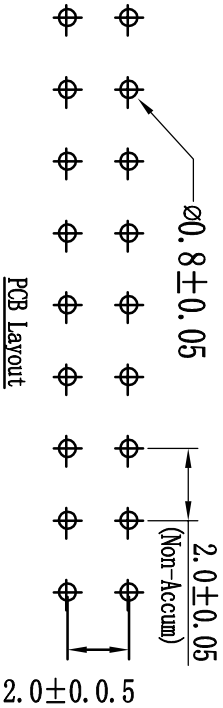

Specifications:  
 Current Rating: 1.5 Amp  
 Voltage Rating: 150V AC/DC  
 Contact resistance: 20m Ohm Max  
 Insulator resistance: 1000M ohm min.  
 Withstanding Voltage: 500V AC/Minute  
 Operating Temperature Range: -40° ~ +105° C  
 Material And Finish  
 Insulator: Polyester (PBT UL94V-0)  
 Insulator Color: Black  
 Contact: Brass  
 Contact Plated: See Contact Plated Tab.

Ordering information

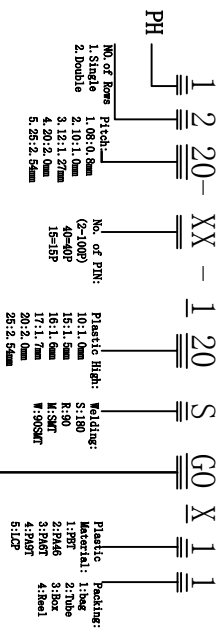

Order Part No.	Order Part No.	Order Part No.	Order Part No.	Order Part No.	Order Part No.	Order Part No.	Order Part No.	Order Part No.	Order Part No.	Order Part No.
00 Lead 100"	01 Lead 100"	02 Lead 100"	03 Lead 100"	04 Lead 100"	05 Lead 100"	06 Lead 100"	07 Lead 100"	08 Lead 100"	09 Lead 100"	10 Lead 100"

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		线性 (LINER)		角度 (ANGLES)	
X ± 0.20	.XX ± 0.15	.XXX ± 0.10	第三级角投影 THIRD ANGLE PROJECTION	X' ± 1°	X" ± 1'

品名 (TITLE): PH2.0 2*NP 180° DIP 系列图				料号 (PART NO.): 1220-XX1205G0X-11	
绘图 (DRAWING)	审核 (CHECK)	批准 (APPROVED)	日期 (DATE)	图号 (DWG NO.):	单位 (UNIT):
					MM



A4