

RoHS Compliant

Customer Drawing


<http://www.goxconn.com>

序号(No) 版本(Rev)


日期(DATE)

设计(DESIGN)


修改记录(REVISION RECORD)
修改说明(DESCRIPTION)

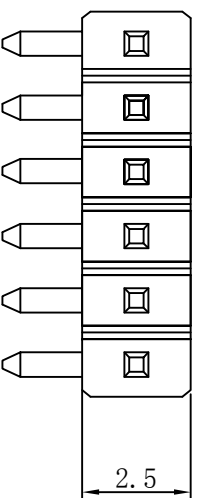

0.64±0.02 Sq

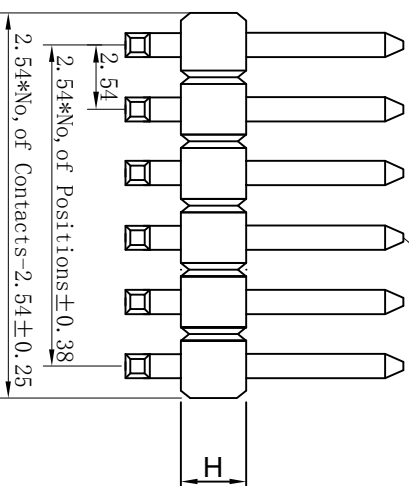


2.54
2.54*No. of Positions±0.38
2.54*No. of Contacts-2.54±0.25

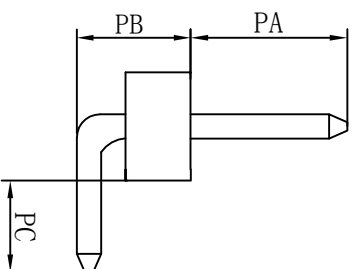

Specifications:
Current Rating: 3 Amp
Voltage Rating: 250V AC/DC
Contact resistance: 20m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 500V AC/Minute
Operating Temperature Range: -25° ~+105° C
Material And Finish
Insulator: Polyester, (PBT UL94V-0)
Insulator Color: Black
Contact: Brass
Contact Plated: See Contact Plated Tab.

Ordering information



NO. of Rows Pitch:
1. Single 1.06:0.8mm
2. Double 2.10:1.0mm
3. 12:1.27mm
4. 20:2.0mm
5. 25:2.54mm

No. of PIN:
1(40P)
40-60P
15:1.0mm
16:1.0mm
17:1.0mm
20:1.27mm
25:2.54mm

Plastic Height:
10:1.0mm S180
15:1.0mm R30
16:1.0mm M30
17:1.0mm W:90SM
20:1.27mm
25:2.54mm

Plastic Finishing:
Material: 1:bing
2:FR4
3:PCB
4:PMPT
5:LC2

Gold Plated	Solder Plated	Sn	Sn	Sn	Sn	Sn	Sn
00	load 100"	11	100"	11	100"	11	100"
01	load 10"	11	100"	11	100"	11	200"
02	load 20"	11	100"	11	100"	11	150"
03	load 30"	11	100"	11	100"	11	100"
04	load 40"	11	100"	11	100"	11	100"
05	load 50"	11	100"	11	100"	11	100"
06	load 60"	11	100"	11	100"	11	100"
07	load 200"	11	100"	11	100"	11	100"

Plastic Base

Type	可定制尺寸
H	1.5/2.54
PA	6.0
PB	3.9
PC	3.0

2.54±0.05
(Non-Accum)

PCB LAYOUT

∅1.02±0.05



未注公差
UNLESS OTHERWISE
SPECIFIED TOLERANCE

线性 (LINER)

角度 (ANGLES)

第三视角投影
THIRD ANGLE
PRODUCTION

品名 (TITLE): PH2.54 1*NP 90° DIP 系列图

绘图 (DRAWING)

审核 (CHECK)

批准 (APPROVED)

日期 (DATE)







A4

料号(PART NO.): 1125-XX125RCOX-11

图号(DWG NO.):

单位 (UNIT): 1:1

页数 (SHEET): 10F-1

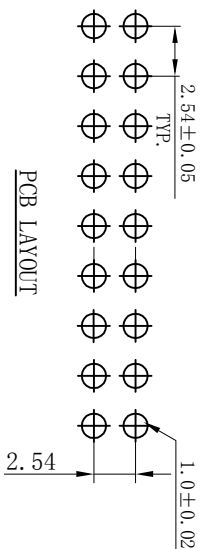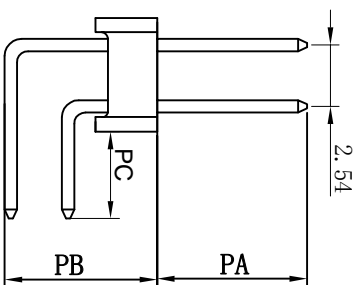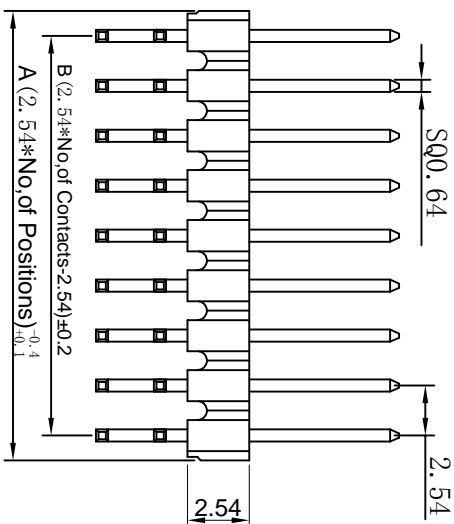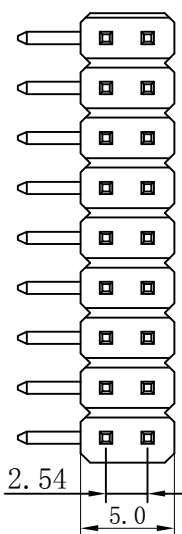


Type	可定制尺寸
H	2.54
PA	6.0
PB	6.9
PC	3.0

Plastic Base

Specifications:

- Current Rating: 3 Amp
- Voltage Rating: 250V AC/DC
- Contact resistance: 20m Ohm Max
- Insulator resistance: 1000M ohm min.
- Withstanding Voltage: 500V AC/Minute
- Operating Temperature Range: -25° ~ +105° C
- Material And Finish
- Insulator: Polyester, (PBT UL94V-0)
- Insulator Color: Black
- Contact: Brass
- Contact Plated: See Contact Plated Tab.

Ordering information



- NO. of Rows Pitch:
 - 1. Single 1.06±0.08mm
 - 2. Double 2.10±1.0mm
 - 3. 12:1 27mm
 - 4. 20:2 54mm
 - 5. 25:2 54mm
- NO. of PIN:
 - 10:1 10mm (2-80P)
 - 15:1 15mm (40-60P)
 - 16:1 16mm (15-15P)
 - 17:1 17mm
 - 21:1 21mm
 - 25:2 54mm

- Plastic Height:
 - S:180
 - R:90
 - M:90
 - W:90SMT
 - 25:2 54mm
- Welding:
 - S:180
 - R:90
 - M:90
 - W:90SMT
 - 25:2 54mm
- Plastic Finishing:
 - Material: 1:ibag
 - 2:FR9
 - 3:PM9T
 - 4:PM9T
 - 5:12P

Code	Material	Finish	Temp	Temp
00	load 100"	Th	100"	Th
01	load 10"	Th	100"	Th
02	load 20"	Th	100"	Th
03	load 30"	Th	100"	Th
04	load 40"	Th	100"	Th
05	load 50"	Th	100"	Th
06	load 100"	Th	100"	Th
07	load 200"	Th	100"	Th



未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		品名 (TITLE): PH2.54 2*NP 90° DIP 系列图	
线性 (LINER)	X ± --	角度 (ANGLES)	X' ± ± 1'
	.X ± 0.20		.X' ± ± --
	.XX ± 0.15		.XX' ± ± --
	.XXX ± 0.10		.XXX' ± ± --
第三视角投影 THIRD ANGLE PROJECTION		核准 (APPROVED)	
		日期 (DATE)	

DRAWING		SHEETING	
绘图 (DRAWING)	审核 (CHECK)	料号 (PART NO.):	图号 (DWG NO.):
第三视角投影	核准 (APPROVED)	1225-XX125RGOX-11	
THIRD ANGLE PROJECTION		版本 (REV):	单位 (UNIT):
	日期 (DATE)	AO	MM
			页数 (SHEET) 10F-1

A4